

## Technical Data Information

Compass Worktop Inc Supports  
TAVCMWT6SKIT.AR & TAVCMWT5SKIT.AR

# R.T. LARGE

ESTABLISHED 1969




### Important note

Support braces are included with the worktop.

These must be cut to length before installation.

Unit	Recommended brace length
500	396mm
600	496mm

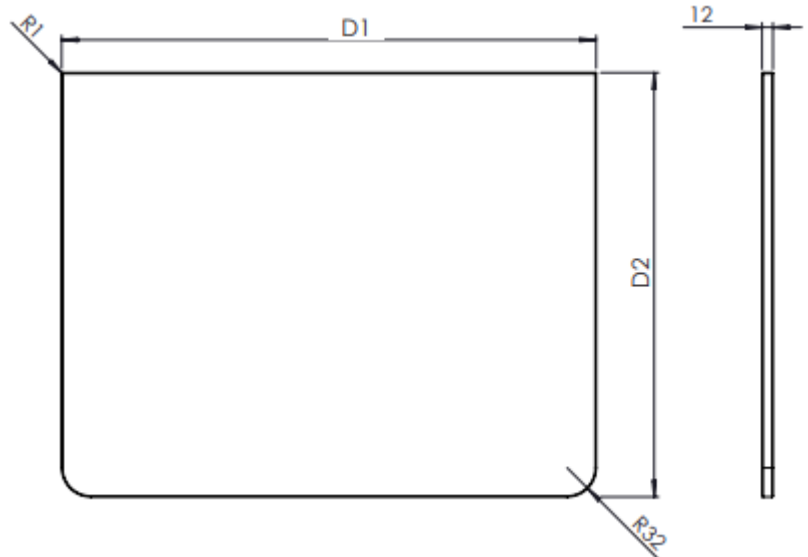

Unit	D1	D2
500	489	416
600	589	467

## ADDITIONAL INFORMATION

### MATERIAL

Has many names including:

- Corian
- LG Hi-macs

A homogenous compound mixture of polyester and aluminium trihydrate (derived from a natural Bauxite ore). This means it is the same material all the way through, so can be cut and sanded back to a perfect finish. Aluminium trihydrate is moulded, vacuum treated and then finished by hand to create a perfectly smooth matt finish which is highly dimensionally accurate. Can be sanded and refinished should any stains occur due to misuse. Can be patch repaired by simply sanding back the affected area.

Material Benefits:

- Point impacts (255g ball dropped from 610mm)
- Stain resistant
- Colourfast
- Temperature resistance

All Dimensions are in millimetres | All Dimensions in mm have a tolerance of  $\pm 5$ mm. The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.